

SHALE SHAKER NAMEPLATE 1

0722 Ex II 2G DEMKO 07 ATEX 0612032

Ex d IIB 160°C

ELECTRIC INDUSTRIAL VIBRATOR  
FOR HAZARDOUS LOCATIONS



NO.

LISTED

CLASS I

GROUP

CD

E129825

OPER. TEMP. T2G -20°C ≤ T amb ≤ 55°C

CLASS I ZONE 1 GROUP II B

SHALE SHAKER NAMEPLATE 2

**MARTIN**  
**ENGINEERING**  
Electric Vibrators

5500 ENG. SERVICE  
ONE MARTIN PLACE  
EPONSET, IL 61245 US  
800-544-2947  
309-594-2384



Manufactured by **g.silingardi** 41049 SASSUOLO

|                                     |            |  |       |      |     |      |      |
|-------------------------------------|------------|--|-------|------|-----|------|------|
| TYPE                                | 17X10-0200 | FRAME                                    | 76    |      |     |      |      |
| CENT. FORCE lbs                     | 0200       | Hp                                       | 2.5   |      |     |      |      |
| FORCE CENT. kg                      | 3705       | Watts                                    | 1802  |      |     |      |      |
| Volt                                | 220/300    | ph                                       | 3     | Hz   | 50  |      |      |
| AMP.                                | 70.9/4.0   | RPM                                      | 1500  |      |     |      |      |
| TEMP. BY RES.                       | 96 °C      | MAX AMBIENT TEMP.<br>TEMP. AMBIANCE MAX. | 25 °C |      |     |      |      |
| INS. CL.<br>L.D. IS.                | F          | L.R. CODE                                | PH    | S.F. | 1.1 | DUTY | CONT |
| MECHANICAL PROT.<br>PROT. MECANIQUE | IP66       | DATE CODE                                |       |      |     |      |      |

MAY BE USED WITH PWM INVERTER DRIVE - CONSTANT TORQUE  
PEUT ETRE UTILISE AVEC VARIATEUR DE FREQUENCES - COUPLE CONST.

20 - 50 Hz

ATTENTION - UTILISER DES CABLES POUR 105 °C MIN  
CAUTION - USE SUPPLY WIRE RATED 105 °C MIN  
BEARING GREASE - GRAISSE DES ROULEMENTS

RIG FLOOR HYDRAULIC POWER UNIT MOTOR NAMEPLATE 1

# 防爆型三相异步电动机



|       |      |                 |           |
|-------|------|-----------------|-----------|
| 型号    | 标准编号 | JB/T7565.1-2004 | 30 Hz     |
| kW    | V    | 71.1/41.0 A     | IP 55     |
| r/min | cosφ | 0.86            | 78 dB(A)  |
|       |      | 定频 S            | 效率 92.0 % |

防爆标志

ExdIIBT4

防爆合格证编号

CNEx07.0937

安全标志编号

—

—

接法

Δ/Y

480 g

轴伸端轴承

6314/Z2

非轴伸端轴承 6314/Z2





出品编号


8BXC048-5

2009 年 1 月


## 南阳防爆集团股份有限公司

RIG FLOOR HYDRAULIC POWER UNIT MOTOR NAMEPLATE 2

|   |            |                 |                 |       |            |        |       |             |
|---|------------|-----------------|-----------------|-------|------------|--------|-------|-------------|
|  <b>FLAMEPROOF THREE-PHASE INDUCTION MOTOR</b>  |            | CONN. Δ Y       |                 |       |            |        |       |             |
| TYPE  | YB2 250M-6 | STANDARD NO.    | JB/T 10001-2004 | 50 HZ | RATING S   | IP 55  | cos φ | 0.86        |
|   | 37 kW      | 380/660 V       | 71.1/30 A       | 985   | r/min      | 78     | dB(A) | EFF. 92.0 % |
| PROTECTION TYPE   | EXdIIBT4   | CERTIFICATE NO. | 707.0937        |       | SAFETY NO. | -      |       |             |
| SERIAL NO.  | S8BC7C48-E | BRG.DE 6314/    | BRG.NDE 6314/72 | 480kg | DATE       | 1.2009 |       |             |
| NAN YANG EXPLOSION PROTECTED GROUP CO., LTD. THE PEOPLE'S REPUBLIC OF CHINA   |            |                 |                 |       |            |        |       |             |

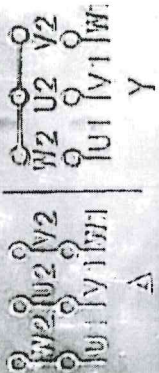

RIG FLOOR HYDRAULIC POWER UNIT PUMP NAMEPLATE



# 轴向柱塞泵 AXIAL PISTON PUMP

型号

16 QJ CY14-1B

MODEL

额定转速

1000 r/min

RATED SPEED

出厂编号

10280

NUMBERING

启东市精久高压油泵厂

公称排量

160 ml

NOM. DISP.

额定压力

31.5 MPa

RATED PRESSURE

20

10

QIDONG JINGJIU HIGH PRESSURE OIL PUMP FACTORY

THE PEOPLE'S REPUBLIC OF CHINA